


BYT 30PI- 400

FAST RECOVERY RECTIFIER DIODES

- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING
- INSULATED: Capacitance 15pF

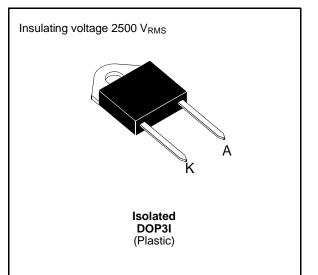

SUITABLE APPLICATIONS

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit	
I _{FRM}	Repetive Peak Forward Current	Peak Forward Current $t_p \le 10 \mu s$		А
I _{F (RMS)}	RMS Forward Current	50	А	
I _{F (AV)}	Average Forward Current	$\begin{array}{l} T_{\rm c}=60^{\circ}C\\ \delta=0.5 \end{array}$	30	А
I _{FSM}	Surge non Repetitive Forward Current	t _p = 10ms Sinusoidal	350	A
Р	Power Dissipation	$T_c = 60^{\circ}C$	50	W
T _{stg} T _j	Storage and Junction Temperature Range		- 40 to + 150 - 40 to + 150	°C

Symbol	Parameter	Value	Unit
V _{RRM}	Repetitive Peak Reverse Voltage	400	V
V _{RSM}	Non Repetitive Peak Reverse Voltage	440	V

THERMAL RESISTANCE

I	Symbol	Parameter	Value	Unit
	R _{th (j} - c)	Junction-case	1.8	°C/W

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

Synbol	Test Conditions		Min.	Тур.	Max.	Unit
I _R	T _j = 25°C	$V_R = V_{RRM}$			35	μΑ
	T _j = 100°C				6	mA
V _F	T _j = 25°C	I _F = 30A			1.5	V
	T _j = 100°C				1.4	

RECOVERY CHARACTERISTICS

Symbol		Test Conditions			Min.	Тур.	Max.	Unit
t _{rr}	$T_j = 25^{\circ}C$	I _F = 1A	di _F /dt = - 15A/µs	$V_R = 30V$			100	ns
		I _F = 0.5A	I _R = 1A	I _{rr} = 0.25A			50	

TURN-OFF SWITCHING CHARACTERISTICS (Without Series Inductance)

Symbol	Test Conditions		Min.	Тур.	Max.	Unit
t _{IRM}	di _F /dt = - 120A/µs	V _{CC} = 200 V I _F = 30A			75	ns
	di _F /dt = - 240A/µs	L _p ≤ 0.05μH T _j = 100°C See figure 11		50		
I _{RM}	di _F /dt = -120A/µs				9	А
	di _F /dt = - 240A/µs			12		

TURN-OFF OVERVOLTAGE COEFFICIENT (With Series Inductance)

Symbol	Test Conditions	Min.	Тур.	Max.	Unit
$C = \frac{V_{RP}}{V_{CC}}$	$ \begin{array}{ll} T_{j}=100^{\circ}C & V_{CC}=60V & I_{F}=I_{F\;(AV)} \\ di_{F}/dt=-30A/\mu s & L_{p}=1\mu H & See \mbox{ figure 12} \end{array} $		3.3		

To evaluate the conduction losses use the following equations: $V_F = 1.1 + 0.0095 I_F$ $P = 1.1 \times I_{F(AV)} + 0.0095 I_F^2(RMS)$

Figure 1. Low frequency power losses versus average current

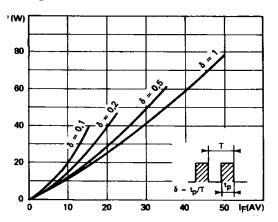


Figure 2. Peak current versus form factor

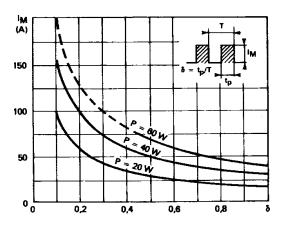


Figure 3. Non repetitive peak surge current versus overload duration

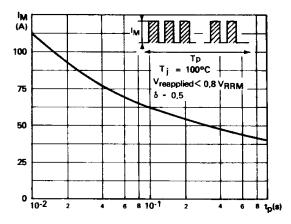


Figure 5. Voltage drop versus forward current

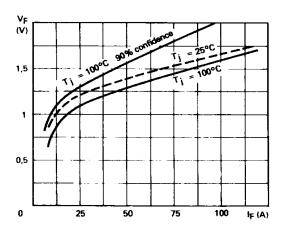


Figure 7. Recovery time versus diF/dt-

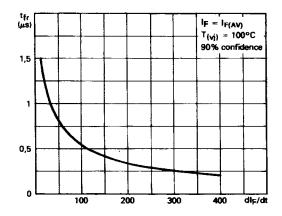


Figure 4. Thermal impedance versus pulse width

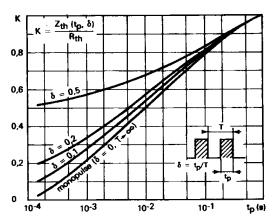


Figure 6. Recovery charge versus di_F/d_{t-}

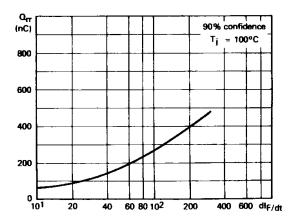


Figure 8. Peak reverse current versus di_F/d_{t-}

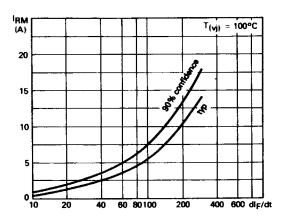


Figure 9. Peak forward voltage versus diF/dt-

Figure 10. Dynamic parameters versus junction temperature.



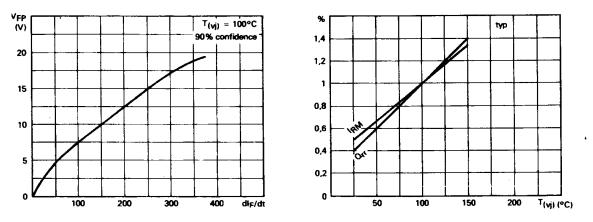


Figure 11. Turn-off switching characteristics (without series inductance).




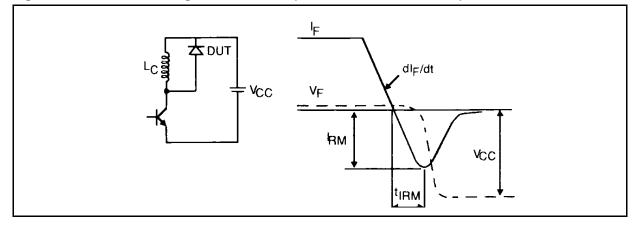

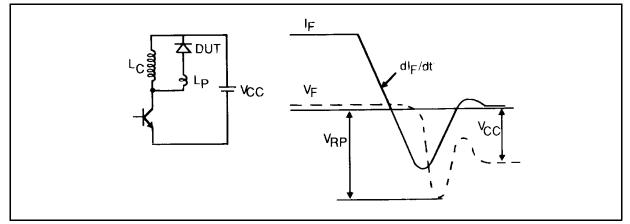

PACKAGE MECHANICAL DATA :

Isolated DOP3I Plastic

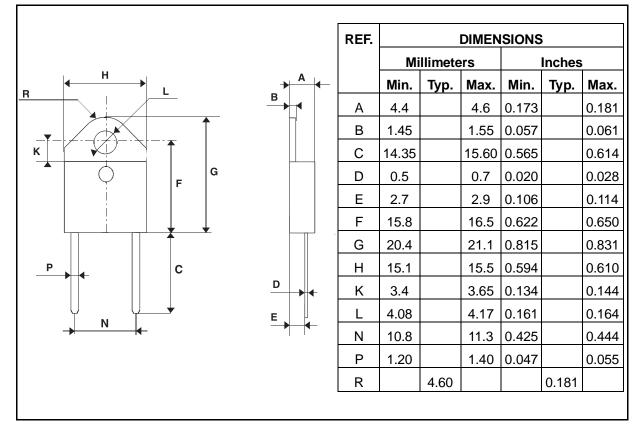

- Marking: type number
- Cooling method: by conduction (method C)
- Weight: 4.52g
- Recommended torque value: 80cm. N
- Maximum torque value: 100cm. N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1998 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco -The Netherlands Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.