


BOARD PIN #	INPUT
1	+V (V _{in})
2	V (GND)
3	OUT 1
4	OUT 2
5	OUT (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	220	260	500
OUTPUT VOLTAGE: (Vrms)	950	1000	1050
OUTPUT CURRENT (mA) x 2	4.5	5.5	6.5
OUTPUT FREQUENCY: (KHz)	25	35	45
OPERATING TEMP: (CELSIUS)	0	25	50

CAUTION:
 REVERSE POLARITY TO INVERTER
 INPUT WILL CAUSE AN OPEN CIRCUIT
 IN FUSE F1.

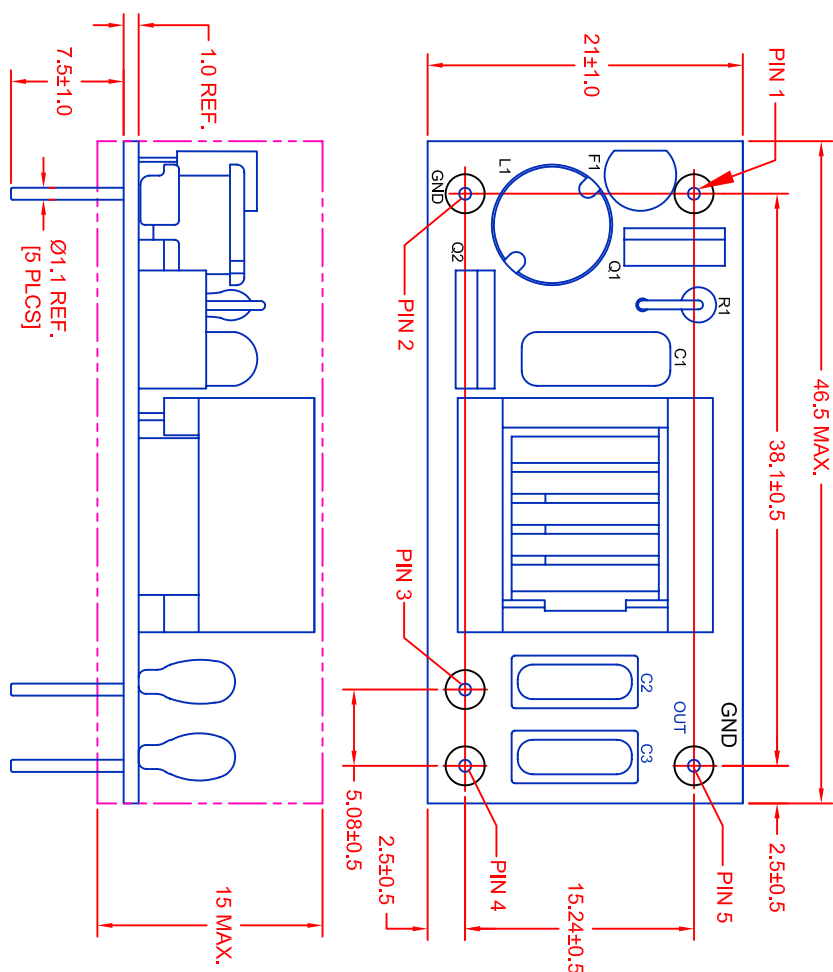

* JKL PART NO.: BXA-12529
 * RoHS COMPLIANCE

REV.	DESCRIPTION/ECO NO.	DATE
A	RELEASED	3/10/03
B	DIM. CHANGE	3/27/03
C	RoHS COMPLIANCE	5/9/06

METRIC		DIMENSIONS ARE IN MILLIMETERS		TITLE	
	THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	1 PL +/- 0.3 2 PL +/- 0.3	12 V CCFL POWER SUPPLY	
DRAWN BY	L. WENGSTROM	APPR'D BY	DATE	SIZE	SCALE
				A	NONE
				FSCM NO.	
				55335	
				DRAWING NO.	
				BXA-12529	
				RELEASED DATE	
				3/10/03	
				REVISION DATE	
				5/9/06	
				REV. NO.	
				B	
				SHEET NO.	
				1 OF 1	

- CAD DRAWING -
 MANUAL REVISIONS NOT PERMITTED